



- TASTE THE DIFFERENCE -

## MODEL CS4

This compact, counter-model single flavor soft serve freezer is perfect for cafes, boutique restaurants, coffee shops, sandwich shops, bars and convenience stores.

### The Electro Freeze Advantage

- **Self Closing Spigot** prevents the mess and eliminates waste
- **Exclusive Auger Design** gently blends, reducing agitation and maintaining product quality and consistency
- **Consistency Control** designed to dispense the finest frozen product available
- **Compact Design** with small footprint
- **Experience Tells** Electro Freeze has been manufacturing quality frozen treat machines since 1929. Superior engineering, product innovations, sturdy construction, quality craftsmanship and dependable performance are Electro Freeze hallmarks.
- **Superior Service Support** backed by a world-wide distributor network

## GRAVITY SOFT SERVE FREEZER


**Compact Series  
Single Flavor**



[electrofreeze.com](http://electrofreeze.com)

FOR MORE INFORMATION CONTACT

800-755-4545 • [sales@electrofreeze.com](mailto:sales@electrofreeze.com)

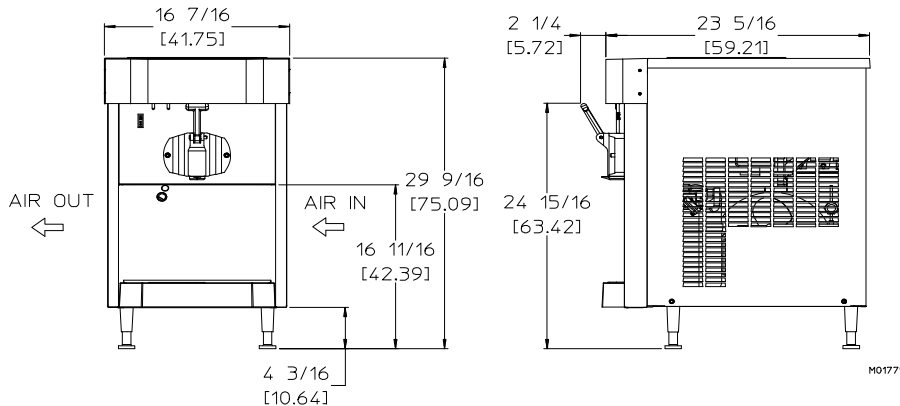

**MODEL CS4 SPECIFICATIONS**

Due to continual product improvements all specifications are subject to change without notice.

<b>Weights</b>	<b>lbs.</b>	<b>kgs.</b>	
Net	205	92	
Crated	266	120	
	<b>cu.ft.</b>	<b>cu.m.</b>	
Volume	20.53	0.58	
<b>Dimensions</b>	<b>in.</b>	<b>cm.</b>	
Width	16-7/16	41.75	
Depth	23-5/16	59.21	
Height	29-9/16	75.09	
<b>Electrical</b>	<b>Total</b>	<b>NEMA</b>	<b>Poles (P)</b>
	<b>Amps</b>	<b>Plug Type</b>	<b>Wires (W)</b>
120/60/1 Air	16.0	5-20P	n/a
220-240/50/1 Air	7.2	n/a	2P, 2W

*Electrical characteristics other than above available on request from factory or local distributor. Check nameplate for exact electrical data.*

**Bidding Spec**

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ Ph \_\_\_\_\_  
 Cooling: \_\_\_\_\_ Neutral \_\_\_\_\_ Yes \_\_\_\_\_ No \_\_\_\_\_  
 Options: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

**Electrical**

One dedicated electrical connection is required. 60 hertz units connect to a standard NEMA 5-20R receptacle. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

**Beater Motor**

One, .75 hp.

**Refrigeration Systems**

One, 4,300 Btuh. R404a.  
 Btuh may vary depending on compressor used.

**Air Cooled**

3" (76mm) air space required on both sides and rear panel for proper air circulation.

**Mix Hopper Capacity:** one - 10 quarts (9.5 liters)  
**Freezing Cylinder Capacity:** one - 2.7 quarts (2.6 liters)

Certified and/or listed by:



\*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-M91 (R2008)  
 \*\*Select Voltages @ 50HZ



**Electro Freeze div. of H.C. Duke & Son, LLC**  
 2116-8th Avenue, East Moline, Illinois 61244 USA  
 Phone (309) 755-4553 • (800) 755-4545  
 FAX (309) 755-9858  
 E-mail: sales@electrofreeze.com • www.electrofreeze.com

**Authorized Distributor**

**LOVE'S THERMAL SYSTEMS, INC.**  
 Wilkes-Barre / Harrisburg  
 800-564-8591  
 www.lovesthermal.com