



- TASTE THE DIFFERENCE -

## MODEL GEN-80

This extreme-volume, pressurized shake freezer features a dispense-head-mounted mixer that blends flavors and/or crumb toppings into the shake product as it is dispensed, producing a high-quality, hand-made shake consistency. The fast, easy way to serve flavors regardless of the viscosity of the flavoring syrup or the fruit pulp it contains all while the Electro Freeze VQM™ system monitors temperature and consistency to provide superior taste and quality. Great for ice cream stores and QSR's that want speed of service with the highest quality of shakes available.

### The Electro Freeze Advantage

- **Innovative Solutions** providing the Best product quality in the industry.
- **Multi-function LED display** with manager smart tools.
- **Patented Mix Transfer System\*** simplest and most reliable pressurized system available
- **Flexible Mix Holding System** pumps directly from bags or from mix containers
- **Exclusive Auger Design** gently blends, reducing agitation, maintaining product quality and consistency
- **Superior Low Temperature Refrigeration System** provides the best in class production and product quality
- **Exclusive Mixer Design** allows the operator to simultaneously dispense and blend in flavoring to reduce servicing times
- **Experience Tells** Electro Freeze has been manufacturing quality frozen treat machines since 1929. Superior engineering, product innovations, sturdy construction, quality craftsmanship and dependable performance are Electro Freeze hallmarks.
- **Superior Service Support** backed by a worldwide distributor network

### Optional


- **Available without the spindle mixer for dispensing a single flavor.**

## PRESSURIZED SHAKE FREEZER featuring

  
**VQM™**  
Virtual Quality  
Management System™



# GEN-80 Shake Freezer

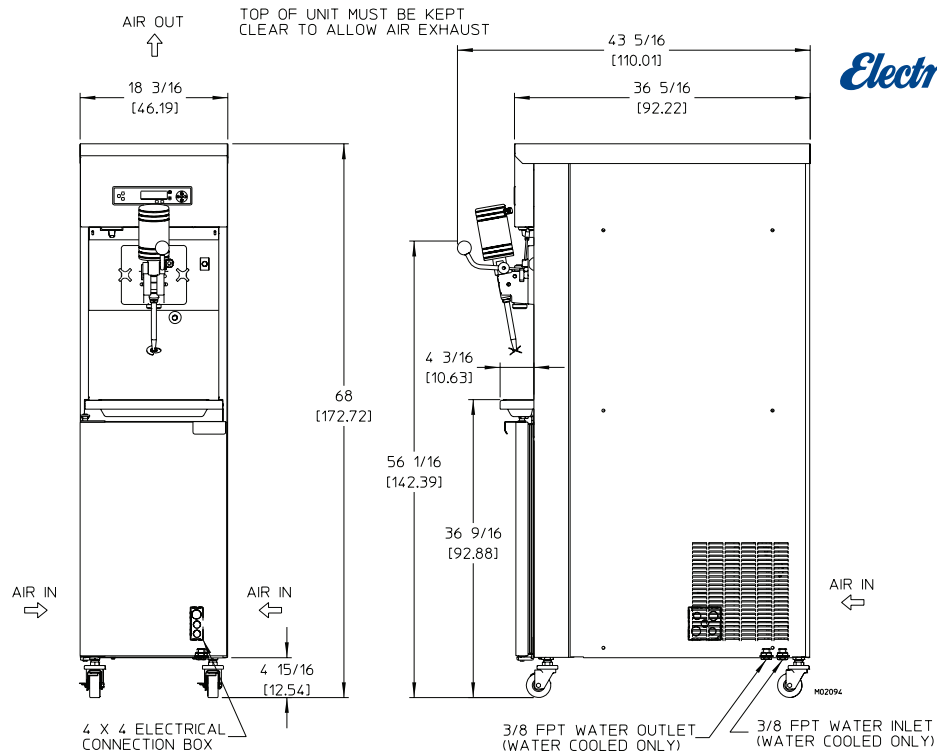

## MODEL GEN-80 SPECIFICATIONS

Due to continual product improvements all specifications are subject to change without notice.

<b>Weights</b>	<b>lbs.</b>	<b>kgs.</b>	
Net	530	240	
Crated	631	286	
	<b>cu.ft.</b>	<b>cu.m.</b>	
Volume	58.42	1.65	
<b>Dimensions</b>	<b>in.</b>	<b>cm</b>	
Width	18-3/16	46.2	
Depth	36-5/16	92.2	
Height	68	172.72	
<b>Electrical</b>	<b>Maximum Fuse Size</b>	<b>Minimum Circuit Ampacity</b>	<b>Poles (P) Wires (W)</b>
208-230/60/1 Air	30	24.5	2P, 2W
208-230/60/1 Water	30	23.0	2P, 2W
208-230/60/3 Air	20	17.5	3P, 3W
208-230/60/3 Water	20	16.0	3P, 3W

Electrical characteristics other than above available on request from factory or local distributor. Check nameplate for exact electrical data.

### Bidding Spec

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ Ph \_\_\_\_\_  
 Cooling: \_\_\_\_\_  
 Options: \_\_\_\_\_

### Electrical

One dedicated electrical connection is required. Manufactured to be permanently connected. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

### Beater Motor

One, 1-1/2 hp.

### Refrigeration Systems

One, 10000 Btuh. R404a.  
 Separate Cabinet Refrigeration, One, 1200 Btuh, R134a Btuh may vary depending on compressor used.

### Air Cooled

6" (15.2 cm) air space required at rear panel or both side panels and 29" (74.7cm) air space above unit for proper air circulation.

**Mix Storage Capacity:** 28 quarts (26.5 liters)

**Freezing Cylinder Capacity:** 10.5 quarts (9.9 liters)

Certified and/or listed by:



\*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13



### Electro Freeze div. of H.C. Duke & Son, LLC

2116-8th Avenue, East Moline, Illinois 61244 USA  
 Phone (309) 755-4553 • (800) 755-4545  
 FAX (309) 755-9858  
 E-mail: sales@electrofreeze.com • www.electrofreeze.com

**Authorized Distributor**  
**LOVE'S THERMAL SYSTEMS, INC.**  
 Wilkes-Barre / Harrisburg  
 800-564-8591  
 www.lovesthermal.com